

ceilingPANEL is made from 8mm PVC with a decorative face. All panels have a tongue and grooved long edge.


SIZE/WEIGHT 2700 x 250 x 8mm/ 9.72kg

PANELS/PACK 4

PACK COVERAGE 2.7 m²

COLOURS Please refer to brochure

ACCESSORIES ceilingPANEL PVC edge profiles 2.7m long are available in three profiles
Type K and M are supplied in a white finish, and Type P in a silver finish.

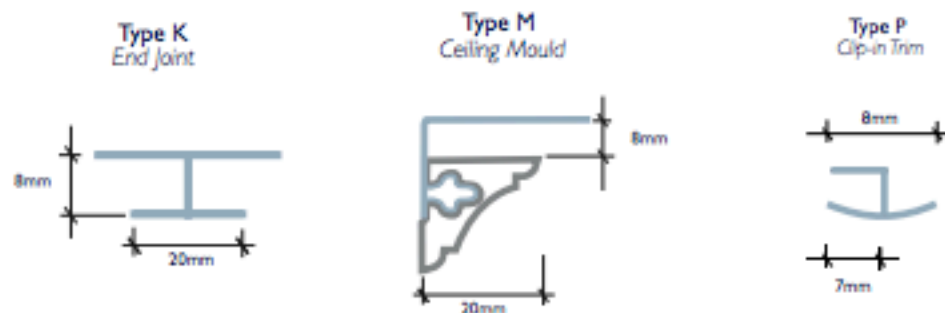

CLEANING

The panels should be cleaned using warm water and a non abrasive mild detergent (not bleach). Scouring products or powders should not be used.

FIRE & SMOKE RATING

ceilingPANEL carries a Class 2 classification, when tested for heat and smoke release in accordance with AS/NZS 3837:1998. The panels have an average specific extinction area of 6 l.8m²/kg. No specific fire-fighting instructions are required.

THERMAL PROPERTIES

ceilingPANEL can with-stand surface temperatures / heat of up to 60°C before any discolouration or warping of the PVC.

CHEMICAL RESISTANCE

PVC is resistant to caustics, mineral oil, and foodstuffs like milk and coffee etc.

IMPACT RESISTANCE

Test EN13245-1:2004: pass: 5 joule at 23degrees centigrade.

SCALE FORMATION

Low susceptibility to hard water. Standard scale remover can be used on any scale build-up.